


SAN ANTONIO DEP CON
125.1 307.0 (4, 22, 31)
127.1 269.1 (13)
D-ATIS
118.9
CLNC DEL
126.7
CPDLC
GND CON
121.9 348.6
SAN ANTONIO TOWER
119.8 257.8

RADAR required.

TOP ALTITUDE:
5000

TAKEOFF MINIMUMS
Rwys 4, 13L/R, 22, 31L/R: Standard.

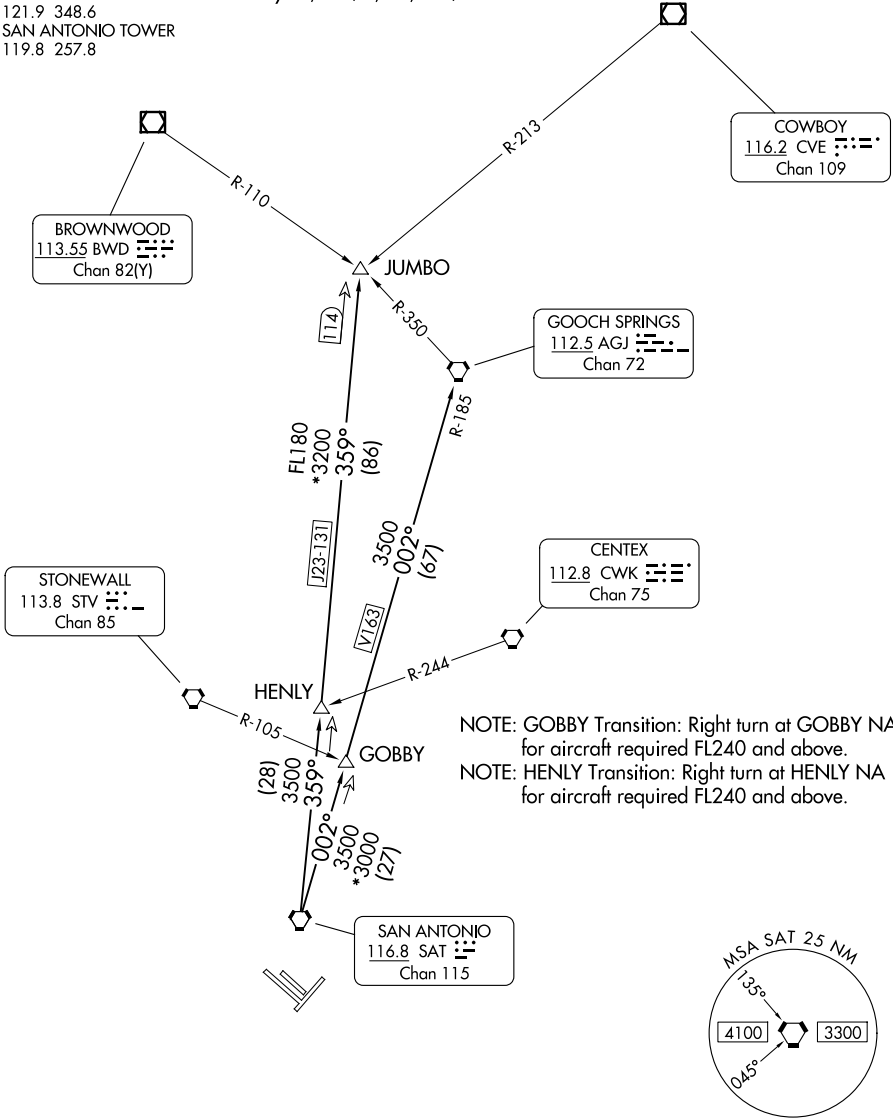

NOTE: Chart not to scale. (CONTINUED ON FOLLOWING PAGE)

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 4, 13L/R, 22, 31L/R: Climb on assigned heading for RADAR vectors to SAT VORTAC, maintain 5000, then on transition/route. Expect filed altitude 10 minutes after departure.

GOBBY TRANSITION (ALAMO5.GOBBY): From over SAT VORTAC on SAT R-002 to GOBBY.

GOOCH SPRINGS TRANSITION (ALAMO5.AGJ): From over SAT VORTAC on SAT R-002 to GOBBY, then on SAT R-002 and AGJ R-185 to AGJ VORTAC.

HENLY TRANSITION (ALAMO5.HENLY): From over SAT VORTAC on SAT R-359 to HENLY.

JUMBO TRANSITION (ALAMO5.JUMBO): From over SAT VORTAC on SAT R-359 to JUMBO.

SC-3, 19 FEB 2026 to 19 MAR 2026

SC-3, 19 FEB 2026 to 19 MAR 2026